

# SUBMERSIBLE PUMPS

## JS150SV

**A**



JS150SV vortex impeller, capable of pumping soft solids up to 25mm. Plastic motor lid, lower motor/bearing housing, impeller and pump body. Single silicon mechanical seal. 10 metres of power cable. 1¼" BSP female outlet, complete with 1¼" male hose tail. The JS150SV pumps must not be installed laying on their side. Maximum immersion 7 metres.

### Features

Plastic Pump Body  
Plastic Impeller  
Max Solids **25mm**

### Applications

Light Duty Sewage  
Clean Water  
Dirty Water

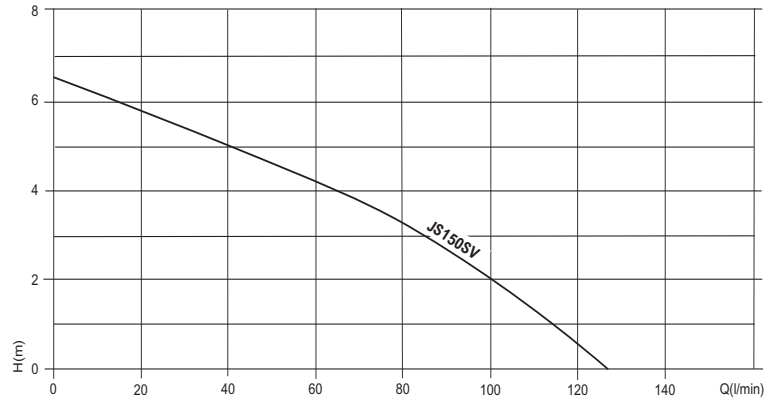

**JS-150  
MANUAL**



**JS-150SVA  
MAC-3**



**JS-150SVAG  
AGMA**

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JS-150 SV MANUAL	230v	1¼"	125/6.5	0.15	1.4	330 x 137 x 178	5.5	011-150	
JS-150 SVA KEY MAC-3	230v	1¼"	125/6.5	0.15	1.4	330 x 137 x 178	5.7	011-150A	
JS-150 SVAG AGMA	230v	1¼"	125/6.5	0.15	1.4	330 x 137 x 200	5.7	011-150AG	
JS-150 SV MANUAL	110v	1¼"	125/6.5	0.15	2.8	330 x 137 x 178	5.5	011-152	
JS-150 SVA KEY MAC-3	110v	1¼"	125/6.5	0.15	2.8	330 x 137 x 178	5.7	011-152A	
JS-150 SVAG AGMA	110v	1¼"	125/6.5	0.15	2.8	330 x 137 x 200	5.7	011-152AG	

# SUBMERSIBLE PUMPS

## JS250SV

**A**



JS250SV vortex impeller, capable of pumping soft solids up to 36mm. Cast iron motor lid, lower motor/seal housing and pump chamber. Stainless steel shaft and outer motor casing. Twin mechanical seals in a lubricated chamber. 10 metres of power cable. 1½” BSP female outlet, complete with 1½” BSP male hose tail. Maximum immersion 7 metres. JS250SV can be fitted to the SR50 coupling foot and claw. See page 28 for dimensions.

### Features

- Cast Iron Pump Body
- Plastic Impeller
- Max Solids **36mm**

### Applications

- Light Duty Sewage
- Clean Water
- Dirty Water

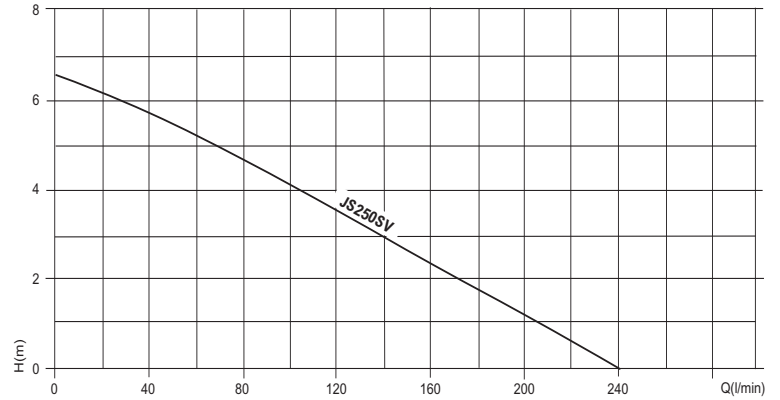

**JS-250SV  
MANUAL**



**JS-250SVA  
MAC-3**



**JS-250SVAG  
AGMA**

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JS-250 SV MANUAL	230v	1½”	240/6.5	0.25	1.9	415 x 160 x 260	15	011-250	
JS-250 SVA MAC-3	230v	1½”	240/6.5	0.25	1.9	415 x 160 x 260	15	011-250A	
JS-250 SVAG AGMA	230v	1½”	240/6.5	0.25	1.9	415 x 215 x 260	15	011-250AG	
JS-250 SV MANUAL	110v	1½”	240/6.5	0.25	4.0	415 x 160 x 260	15	011-252	
JS-250 SVA MAC-3	110v	1½”	240/6.5	0.25	4.0	415 x 160 x 260	15	011-252A	
JS-250 SVAG AGMA	110v	1½”	240/6.5	0.25	4.0	415 x 215 x 260	15	011-252AG	

# SUBMERSIBLE PUMPS

## JS SV SEWAGE PUMPS

**A**

Side vertical outlet (removable for coupling foot), twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel shaft and motor case. Cast iron lower motor bearing/seal housing, motor top cover and volute. Complete with 10 metres of power cable. Hose tails are supplied with all models. Suitable for drainage, dirty water and sewage applications. Automatic pumps are fitted with MAC-3 floats, allow approx 300mm away from the pump to operate correctly. See pages 74-78 for control panels and 82-87 for float switches.


### Features

- Cast Iron Pump Body
- Cast Iron Vortex Impeller
- Max Solids
- JS400SV 650SV **35mm**
- JS750SV **46mm** JS1500SV **65mm**




### Applications

- Heavy Duty
- Dirty Water
- Drainage
- Sewage

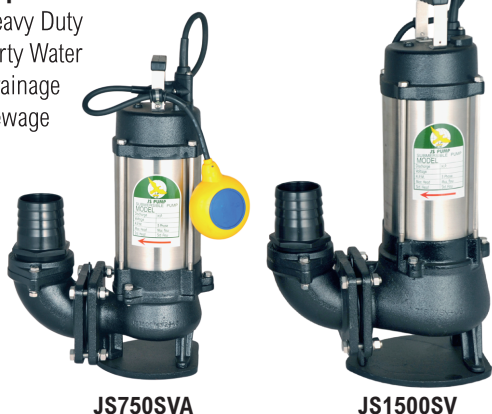

JS750SVA

JS1500SV

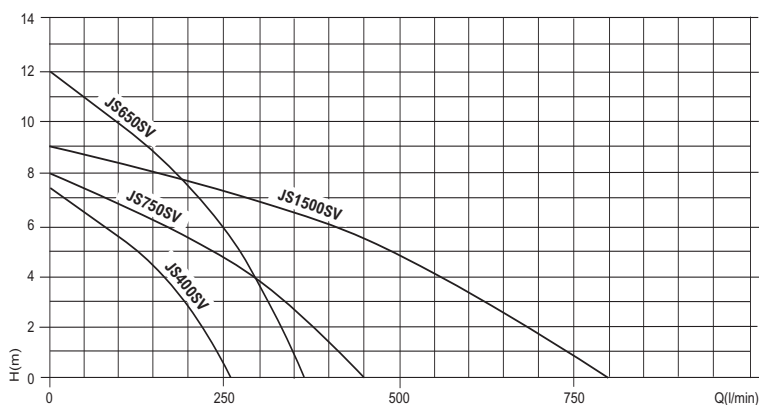

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JS-400SV MANUAL	230v	2"	260/7.5	0.4	3.8	460 x 160 x 275	18.6	012-410	
JS-400SV AUTO	230v	2"	260/7.5	0.4	3.8	460 x 160 x 275	18.6	012-410A	
JS-400SV MANUAL	110v	2"	260/7.5	0.4	7.6	460 x 160 x 275	18.6	012-414	
JS-400SV AUTO	110v	2"	260/7.5	0.4	7.6	460 x 160 x 275	18.6	012-414A	
JS-650SV MANUAL	230v	2"	360/12	0.75	5.5	485 x 160 x 275	22.1	011-700	
JS-650SV AUTO	230v	2"	360/12	0.75	5.5	485 x 160 x 275	22.1	011-700A	
JS-650SV MANUAL	110v	2"	360/12	0.75	11	485 x 160 x 275	22.1	011-702	
JS-650SV AUTO	110v	2"	360/12	0.75	11	485 x 160 x 275	22.1	011-702A	
JS-750SV MANUAL	230v	3"	450/8	0.75	6.8	530 x 160 x 325	32.3	012-751	
JS-750SV AUTO	230v	3"	450/8	0.75	6.8	530 x 160 x 325	32.3	012-751A	
JS-750SV MANUAL	110v	3"	450/8	0.75	13	530 x 160 x 325	32.3	012-754	
JS-750SV AUTO	110v	3"	450/8	0.75	13	530 x 160 x 325	32.3	012-754A	
JS-1500SV MANUAL	230v	3"	795/9	1.5	12	615 x 190 x 385	41	011-768	
JS-1500SV AUTO	230v	3"	795/9	1.5	12	615 x 190 x 385	41	011-768A	

### COUPLING FOOT, CLAW & TOP BRACKET KITS

MODEL	SIZE	CODE
SR-50S	2"	020-501S
SR-80	3"	020-504

Dimensions on page 28.



SR50S



SR80