

For sealed heating installations (acc. to EN12828) and chilled water (cooling) installations.

Expansion vessels keep the pressure of the installation stable by temporarily absorbing the extra water volume that is generated by heating or cooling installations.

Advantages


- Sustainable expansion vessels thanks to innovative technology.
- The Flexcon Premium expansion vessels have a plastic membrane (12 - 35 litres) made of thermoplastic polyolefin (TPO). The new membrane has a high flexibility and low permeability. The environmental performance of the new membrane is much better and TPO can be burned cleaner or recycled into products more effectively.
- The plastic membrane is much lighter because it requires up to 50% less material. This saves raw materials, energy (production) and fuel (transport) and results in a large reduction of CO₂ emissions.
- The box is made from FSC certified cardboard and the version with the lowest available CO₂ footprint has been selected. The manual is printed on FSC certified paper.
- A long service life is guaranteed with a 15-year warranty and therefore also saves on maintenance.
- Extremely low permeability of the diaphragm ensures that pre-charge pressure is maintained for longer.
- The flexible diaphragms, with rolling action, are preformed and, in contrast to a bag type bladder, prevent stretching so that their properties are preserved over the long term.
- The two halves of the vessel are coated prior to assembly, not afterwards. Therefore there is no risk of corrosion on the clamp ring and the diaphragm does not have a service life-reducing thermal shock during production.
- The unique zinc plated steel clench ring construction clamps the diaphragm between the two deep drawn steel vessel halves. This not only ensures a perfect seal but also prevents mechanical damage of the diaphragm during use (load distribution over the entire clamping area and not at 1 central suspension point).
- The gas side is filled with nitrogen, and not with air, so that corrosion is prevented and the pressure loss is even more limited.
- The nitrogen air valve is countersunk on the vessel to protect it from damage, it is in turn further protected by a cover plate from recycled plastic.
- The profile on the diaphragm prevents it from sticking to the inside wall of the vessel and ensures inflow of expansion water at the earliest increase in pressure.
- The uncoated taper water connection thread ensures easy and water tight installation.
- Finished with a gleaming epoxy-powder coating.
- Each vessel is functionally tested before it leaves the factory.



Technical Specifications

- Maximum working pressure: 6.0 bar.
- Vessels in accordance with EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Min./ max. temperature diaphragm: -10 / 90 °C.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- In accordance with Pressure Equipment Directive 2014/68/EU.
- Red (RAL 3002) epoxy powder coating.
- Flexcon Premium 35 - 80: With feet and including mounting kit.

Description	Flexcon Premium exp. vessel 2/0,5 [6bar]		
Order Code	16937		
GTIN	08712874169371		
Model	<u>Flexcon Premium 2 - 80 / 6 bar</u>		
Capacity [l]	2		
Pre-charge [bar]	0.5		
Dimensions	A [mm]	216	
	B [mm]	144	
	Ø C [mm]	-	
	D [mm]	-	
Diaphragm	Butyl		
Syst. conn. (E)	G $\frac{3}{4}$ " M		
Weight [kg]	1.7		

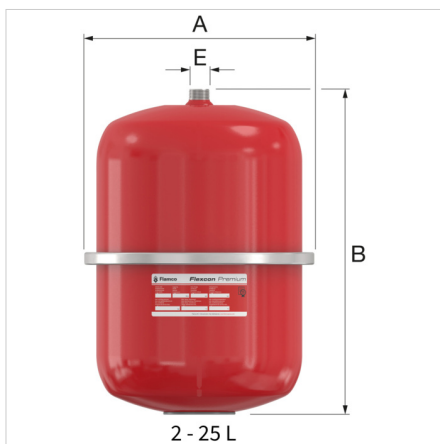



Classification General Data

Etim Group	Pressure increase/decrease
Etim Class	Membrane pressure expansion vessel
Product Name	Flexcon Premium 2/0,5 [6bar]
Brand	Flamco
Product Type	2/0,5
Artikelnummer	16937
GTIN	08712874169371

Attributes

Suitable for central heating	Yes
End pressure	6 Bar
Suitable for cooling	Yes
Suitable for tap water	No
Suitable for tap water	No
Volume	2 Litre
Pre-pressure	0.5 Bar
On base, vertical	No
On base, horizontal	No
Max. operating pressure	6 Bar
With fixed wall support	No
Vertical positioning	Yes
Max. medium temperature (continuous)	90 Degrees celsius
Horizontal positioning	No
With legs	No
With exchangeable membrane	No
Nominal diameter expansion connection	3/4 inch (20)
Outer pipe diameter, expansion connection	26.5 Millimetre
Connection	External thread cylindrical BSPP-G (ISO 228-1)
Material membrane/bladder	IIR (butyl)
With vessel manifold	No
Colour	Red
With drain	No
Diameter	197 Millimetre
Height	144 Millimetre
With pressure gauge	No
With safety valve	No
With mounting material	No
Max. glycol mixture	50 Percentage

Find more information online:

[Installation and operating instruction](#)
[Declaration of conformity PED 2014/68/EU](#)
[CE Declaration of Conformity Module A](#)
[CE Declaration of Conformity Module B](#)
[UKCA Declaration of conformity](#)
[UKCA Declaration of Conformity Module A](#)
[UKCA Declaration of Conformity Module B](#)
[PED Module D](#)
[PED Module D1](#)
[Flexcon Premium 2 - 80 DWG](#)
[Flexcon Premium 2 - 80 STEP](#)
[Flexcon Premium 2 - 80 RFA](#)
[Leaflet](#)
[Brochure Life cycle assessment Flexcon Premium](#)
[Export catalogue](#)
[White paper - A half is more than one](#)
[Packaging data](#)
[Install video Flexcon Premium](#)

Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamcogroup.com