

For sealed heating installations (acc. to EN12828) and chilled water (cooling) installations.

Advantages

- Nitrogen gas filling for longer maintenance of pre-pressure.
- Each vessel is factory tested.
- Diaphragm: Flexible rubber with rolling action.


Technical Specifications

- Maximum working pressure: 6.0 bar.
- Vessels in accordance with EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Min./ max. temperature diaphragm: -10 / 70 °C.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- All welded construction.
- In accordance with Pressure Equipment Directive 2014/68/EU.
- Tilting height:
800L: 1865 mm.
1000L: 2195 mm.
- Red (RAL 3002) epoxy powder coating.



Description	Contraflex exp.ves. 500/1.5[6bar]	
Order Code	26523	
GTIN	08712874265233	
Model	<u>Contra-Flex 100 - 1000</u>	
Capacity [l]	500	
Pre-charge [bar]	1.5	
Dimensions	Ø A [mm]	790
	B [mm]	1330
	C [mm]	610
	E [mm]	-
Syst. conn. (D)	R 1"	
Weight [kg]	60.2	



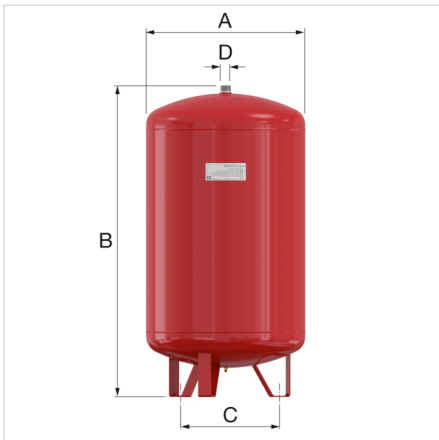

Classification General Data

Etim Group

Etim Class

Product Name Contraflex exp.ves. 500/1.5[6bar]

Brand Flamco

Product Type 500

Artikelnummer 26523

Find more information online:

[Installation and operating instruction](#)

[Declaration of conformity PED 2014/68/EU](#)

[PED Module D](#)

[PED Module D1](#)

[Declaration of conformity UKCA](#)

[Contra-Flex ADSK](#)

[Contra-Flex ADSK Revit](#)

[Contra-Flex DWG](#)

[Contra-Flex IPT](#)

[Contra-Flex STEP](#)

[Export catalogue](#)

[Packaging data](#)

Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamcogroup.com