

This insulation set for Flamco Clean (Smart) can be easily attached and consists of two halves that lock into each other by means of hook fasteners and deep-drawn synthetic caps. The melamine insulation foam (thickness 50 mm) is glued to the polystyrene outer jacket (thickness 1 mm).

Advantages


- Suitable for retrospective installation.
- 100% recyclable.

Technical Specifications

- Insulation value (λ): 0.035 W/mK.
- Fire class B2 according to DIN 4102.
- Colour: aluminium coloured (RAL 9006).



| | | |
|-------------|-----------------------------|-----|
| Description | Flamco Clean DN80 IsoPlus | |
| Order Code | 28872 | |
| GTIN | 08712874288720 | |
| Model | <u>Flamco Clean IsoPlus</u> | |
| Dimensions | A [mm] | 615 |
| | B [mm] | 380 |
| Weight [kg] | 2.2 | |

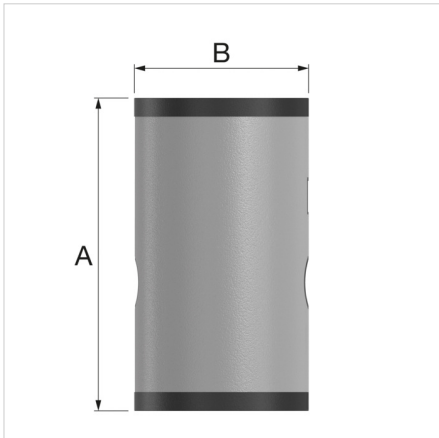

Classification General Data

| | |
|---------------|--|
| Etim Group | Filters/separators |
| Etim Class | Insulation cover for air-/dirt separator |
| Product Name | Flamco Clean DN80 IsoPlus |
| Brand | Flamco |
| Product Type | 80 |
| Artikelnummer | 28872 |
| GTIN | 08712874288720 |

Attributes

| | |
|----------------------------|---------------------|
| Material insulation | Other |
| Material casing | Polystyrene (PS) |
| Temperature protected till | 120 Degrees celsius |
| Height | 615 Millimetre |

Find more information online:

[Installation and operating instruction](#)

[Export catalogue](#)

[Packaging data](#)

Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamcogroup.com